

 **419-480-9118**
 **cs@toledo-tools.com**
 **www.toledo-tools.com**

TOLEDO TOOLS

PRODUCT CATALOG

Toledo Tools



Toledo, Ohio 43614
United States

419-480-9118 
cs@toledo-tools.com 

SUPER DOPE ANAEROBIC PIPE THREAD SEALANT - 750ML (25OZ) FITS LOCTITE® 565 - QTY 30

SKU: SD-750ML-030

PRICE: \$1,059.99

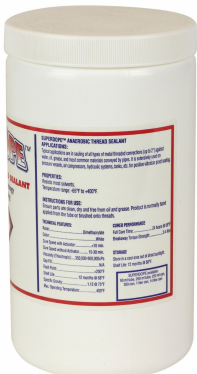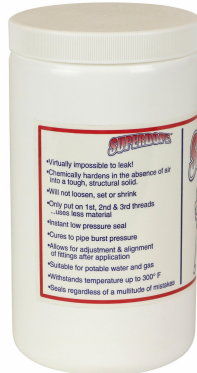

**PRODUCT
DESCRIPTION**

Super Dope Anaerobic Pipe Thread Sealant is designed for the sealing and locking between metal pipe and metal fittings. Super Dope chemically hardens in the absence of air between close fitting metal surfaces. An instant low pressure seal is obtained up to 100 PSI and after curing occurs can withstand up to 10,000 PSI. This make fittings virtually impossible to leak. Super Dope also allows for adjustment and alignment of fittings after installation. If the installation needs to be removed or moved disassembly is permitted. Super Dope can withstand temperatures up to 400° F. This product can be Compared to LOCTITE® 565.

- Instant low pressure seal (100 PSI, Max: 10,000)
- Cures to pipe burst pressure
- Allows for adjustment and alignment of fittings after application
- Permits disassembly
- Pipe joints and fittings are locked against vibration loosening
- Withstands temperature up to 400° F
- Cross Reference: LOCTITE® 565
- Bottle Size: 750 ML / 25 OZ
- Case Quantity: 30

**ADDITIONAL
INFORMATION**

More Information

Manufacturer	Super Dope
Description	<p>Super Dope Anaerobic Pipe Thread Sealant is designed for the sealing and locking between metal pipe and metal fittings. Super Dope chemically hardens in the absence of air between close fitting metal surfaces. An instant low pressure seal is obtained up to 100 PSI and after curing occurs can withstand up to 10,000 PSI. This make fittings virtually impossible to leak. Super Dope also allows for adjustment and alignment of fittings after installation. If the installation needs to be removed or moved disassembly is permitted. Super Dope can withstand temperatures up to 400° F. This product can be Compared to LOCTITE® 565.</p> <ul style="list-style-type: none">• Instant low pressure seal (100 PSI, Max: 10,000)• Cures to pipe burst pressure• Allows for adjustment and alignment of fittings after application• Permits disassembly• Pipe joints and fittings are locked against vibration loosening• Withstands temperature up to 400° F• Cross Reference: LOCTITE® 565• Bottle Size: 750 ML / 25 OZ• Case Quantity: 30



419-480-9118



cs@toledo-tools.com



www.toledo-tools.com

TOLEDO TOOLS